

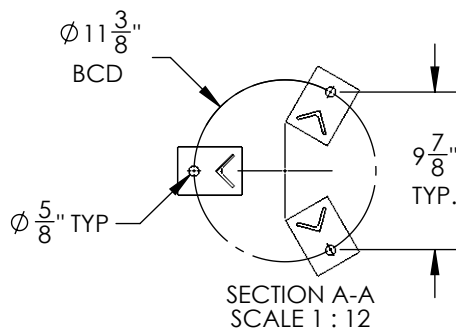
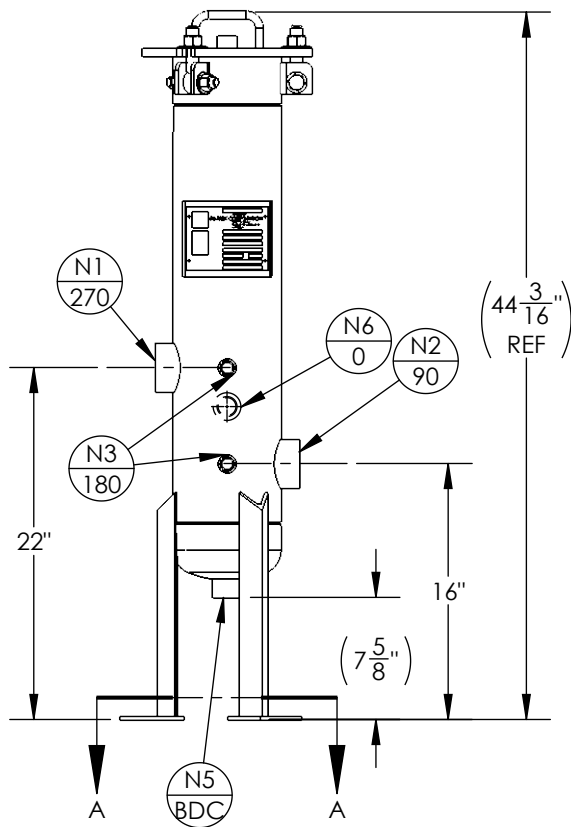


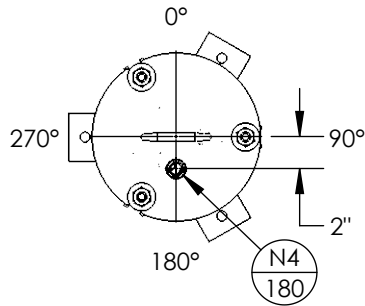

NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 3000# NPT	INLET
N2	1	2" 3000# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1" 3000# NPT	CLEAN DRAIN
N6	1	1" 3000# NPT	DIRTY DRAIN
VESSEL DESIGN CONDITIONS			
CODE: ASME CODE SECTION VIII DIV 1, 2017 EDITION			
M.A.W.P.: 150 PSI @ 400°F		M.D.M.T.: -50° F @ 150 PSI	
M.A.W.P.: FV PSI @ 400°F			
CORROSION ALLOWANCE: NONE		HYDROTEST PRESS: 210 PSI	
STAMP: UM		SERVICE: UNK. LIQUID NON LETHAL	
PWHT: N/A		RADIOGRAPHY: N/A	
MATERIAL: SS316		GASKET: BUNA	

- NOTES:
- VESSEL WILL HOUSE (QTY=3) 2.5" OD x 20" LG. CARTRIDGES.
 - DRY WEIGHT: 66.52 LBS
 - FLOODED WEIGHT: 107 LBS
 - SHIPPING WEIGHT: 130 LBS
 - VESSEL VOLUME: 0.60 FT³

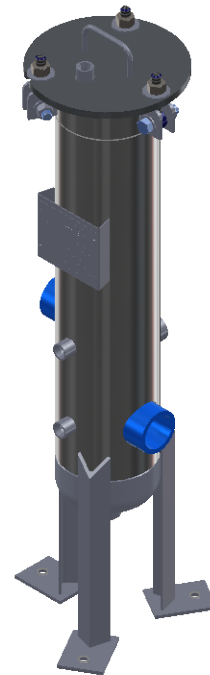

APPROVED WITH MARK-UPS		APPROVED	
 THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005" FRACTIONAL .XX = ±1/8" ANGULAR = ± 1° MAX. MACHINED SURFACE FINISH 125/√		 FIL-TREK CORPORATION 55 Stafford Court Cambridge, Ontario N1T 1B3 Canada Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com	
THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION			
EQUIPMENT:		GL SERIES (CARTRIDGE FILTER HOUSING)	
MODEL NO:		S6GL06-003-2-2P-150	
CUSTOMER:			
PARENT: NEW DESIGN	DRAWN: JN CHK'D: NV	DATE: 30/11/19 SCALE: NTS	Serial No. Part No. 001001-00450
			REV. No. 0