




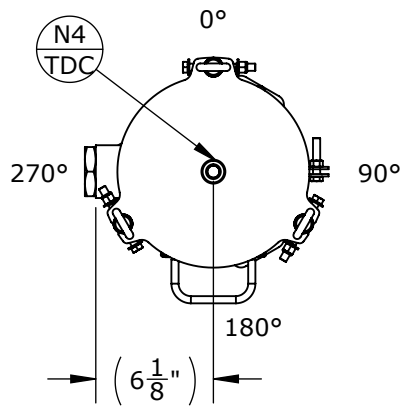


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# NPT	INLET
N2	1	2" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	2" 150# NPT	SPARE

VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA
M.A.W.P.:	FV PSI @ 250°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	CS		

NOTES:

1. VESSEL DRY WEIGHT: 61.000 LBS.
2. SHIPPING WEIGHT: 120 LBS.
3. FLOODED WEIGHT: 107 LBS.
4. VESSEL VOLUME: 0.62 CU. FT.
5. VESSEL WILL HOUSE (QTY=1) SIZE ONE SS304 BASKET

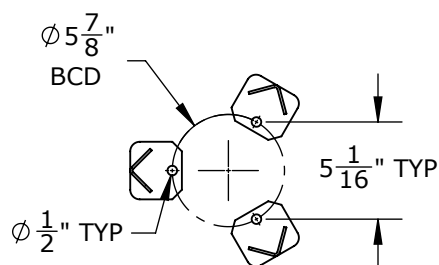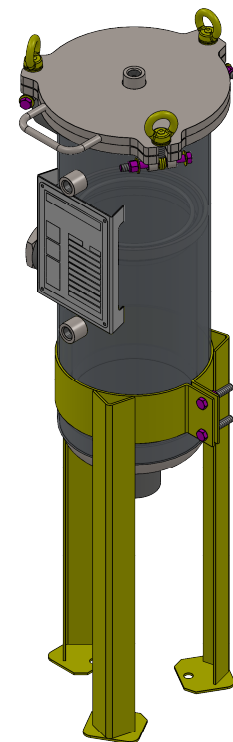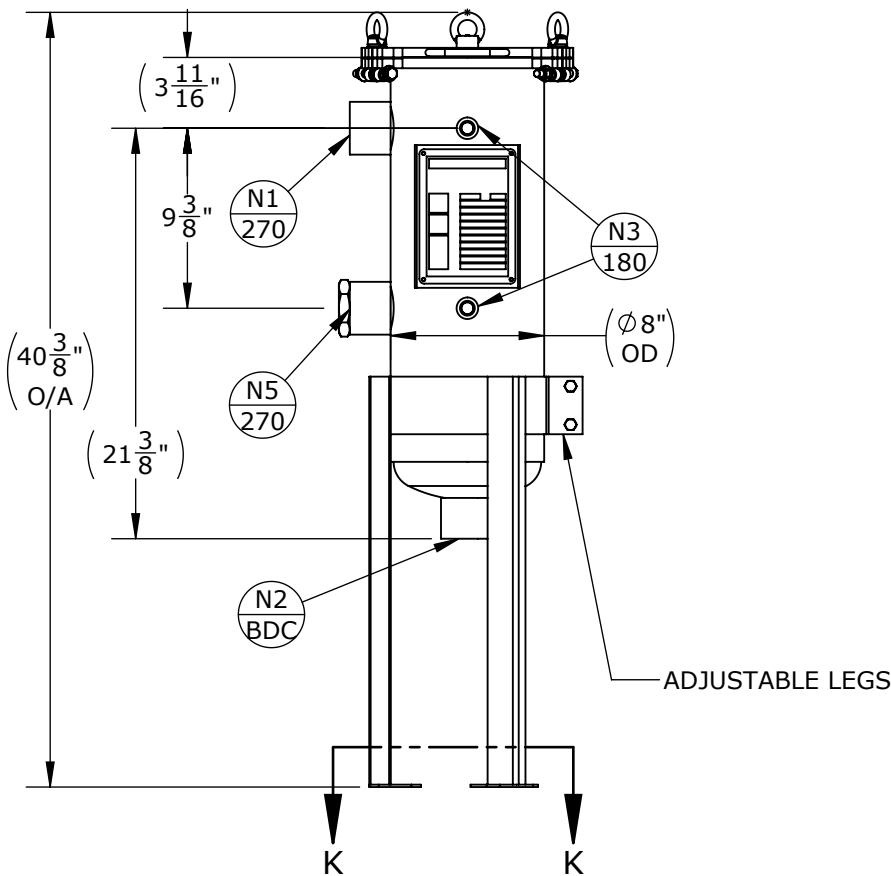

SECTION K-K

APPROVED WITH MARK-UPS		☐	APPROVED		☐
 THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED DECIMAL X = ±.1" .XX = ±.02" .XXX = ±.005" FRACTIONAL = ±1/8" ANGULAR = ± 1° MAX. MACHINED SURFACE FINISH 125/√ PARENT: NONE		 FIL-TREK CORPORATION 55 Stafford Court Cambridge, Ontario N1T 1B3 Canada Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com THIS DRAWING IS THE PROPERTY OF "FIL-TREK CORPORATION" AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION EQUIPMENT: ESL SERIES (SINGLE BAG FILTER VESSEL) MODEL NO: ESL111-2P-CDB-150 CUSTOMER: STOCK DRAWN: FZ DATE: 1/29/2025 SERIAL No. 002001-20036 CHK'D: TS SCALE: NTS REV. No. 0			