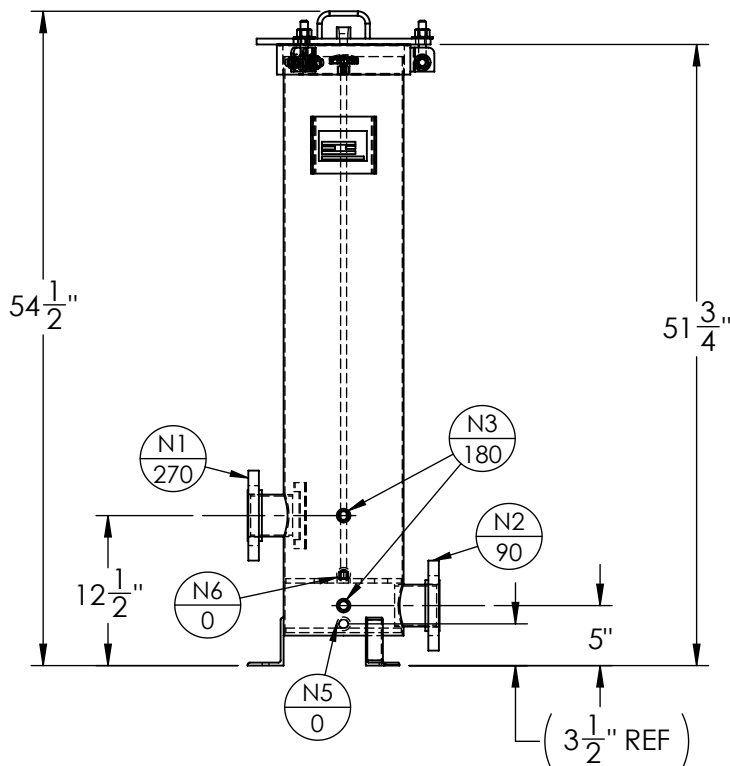
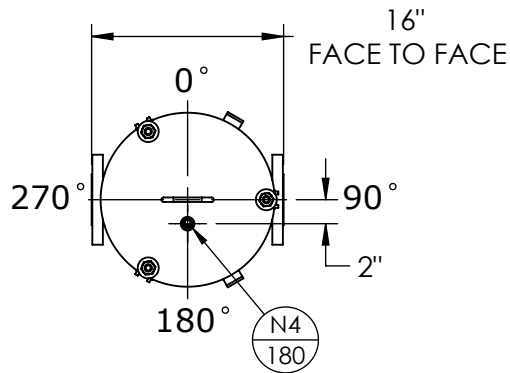


NOZZLE SCHEDULE



MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	3" 150# RFSO	INLET
N2	1	3" 150# RFSO	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1/2" 3000# NPT	CLEAN DRAIN
N6	1	1/2" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE:	BEST COMMERCIAL PRACTICE		
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA-N
M.A.W.P.:	FV PSI @ 250°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	SS316		

NOTES:

VESSEL WILL HOUSE (QTY=7) 2.5" OD x 40" LG CARTRIDGES. DRY WEIGHT: 146.73 #'s FLOODED WEIGHT: 307 #'s SHIPPING WEIGHT: 180 #'s VESSEL VOLUME: 2.5 C.F.

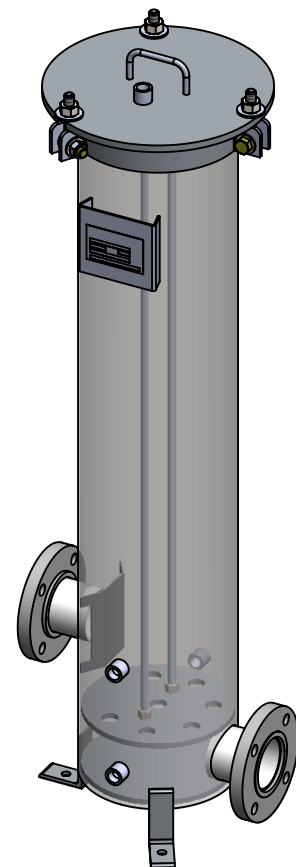

FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: CARTRIDGE FILTER HOUSING (EAQ SERIES)

MODEL NO: S6EAQ10-007-4-3F-SW

CUSTOMER: STOCK

PARENT:	DRAWN: JJJ	DATE: 26/6/2018	SERIAL No. V10311	Part No. 001021-00071	REV. No. 0
	CHK'D: CW	SCALE: NTS			