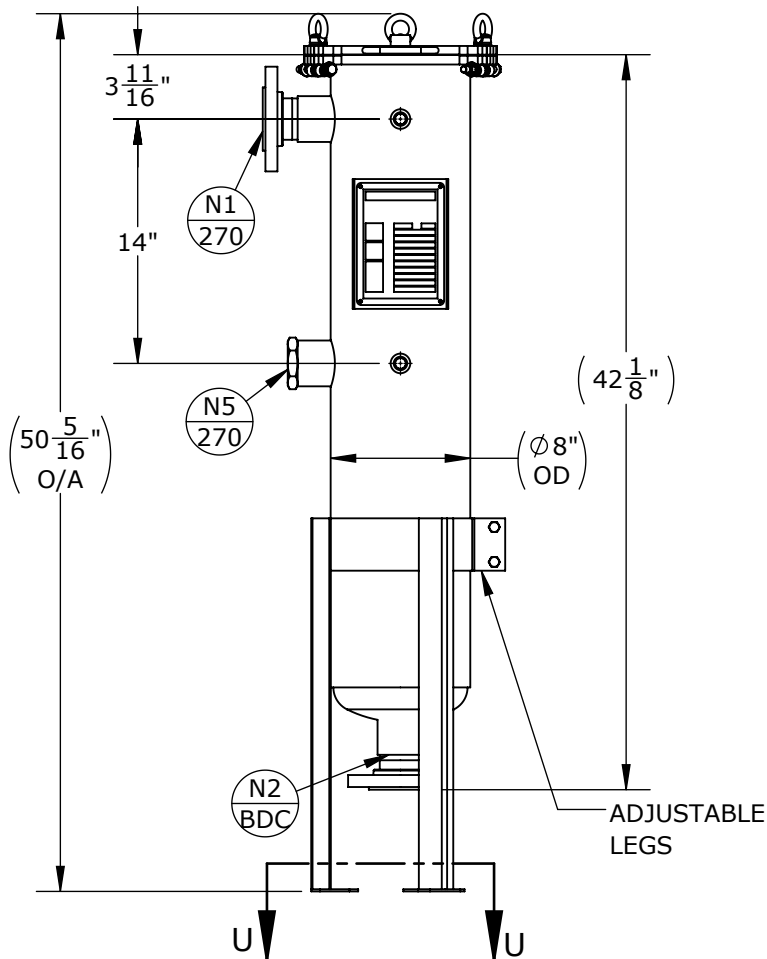
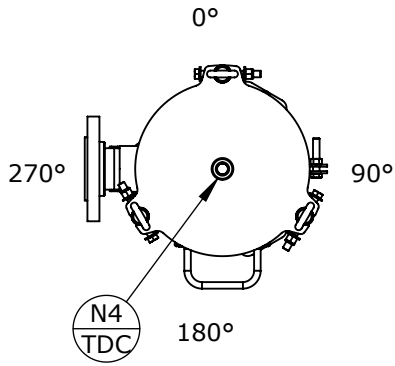


SECTION U-U

NOZZLE SCHEDULE



MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# FFLJ	INLET
N2	1	2" 150# FFLJ	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	2" 150# NPT	SPARE

VESEL DESIGN CONDITIONS

CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA-N
M.A.W.P.:	FV PSI @ 250°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	SS304		

NOTES:

1. VESSEL DRY WEIGHT: 88.00 LBS.
2. SHIPPING WEIGHT: 150 LBS.
3. FLOODED WEIGHT: 160 LBS.
4. VESSEL VOLUME: 1.05 CU. FT.
5. VESSEL WILL HOUSE (QTY=1) SIZE TWO SS304 BASKET

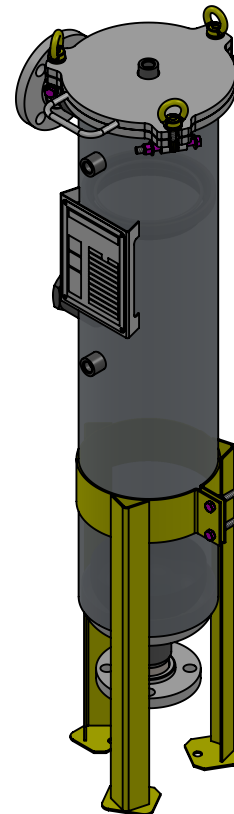

PARENT:
NONE



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (BAG FILTER VESSEL)

MODEL NO: S4ESL112-2F-CDB-150

CUSTOMER: STOCK

DRAWN: JG

DATE: 2024-03-11

SERIAL No.


Part No.
002001-18524

REV. No.
0

CHK'D: TS

SCALE: NTS

ITEM NO.	PART NUMBER	Description	QTY.
1	002001-18521	S4ESL112-2P-CDB-150	1
2	014023-00040	ADAPTER NPT02 FFLJ CL150 SS304	2
	014023-00037	THREADED STUB END, NPT02 TYPE A SHORT, SA403 WP304	1
	022007-00003	FLANGE FFLJ B16.5 CL150 NPS2 SA182 F304	1

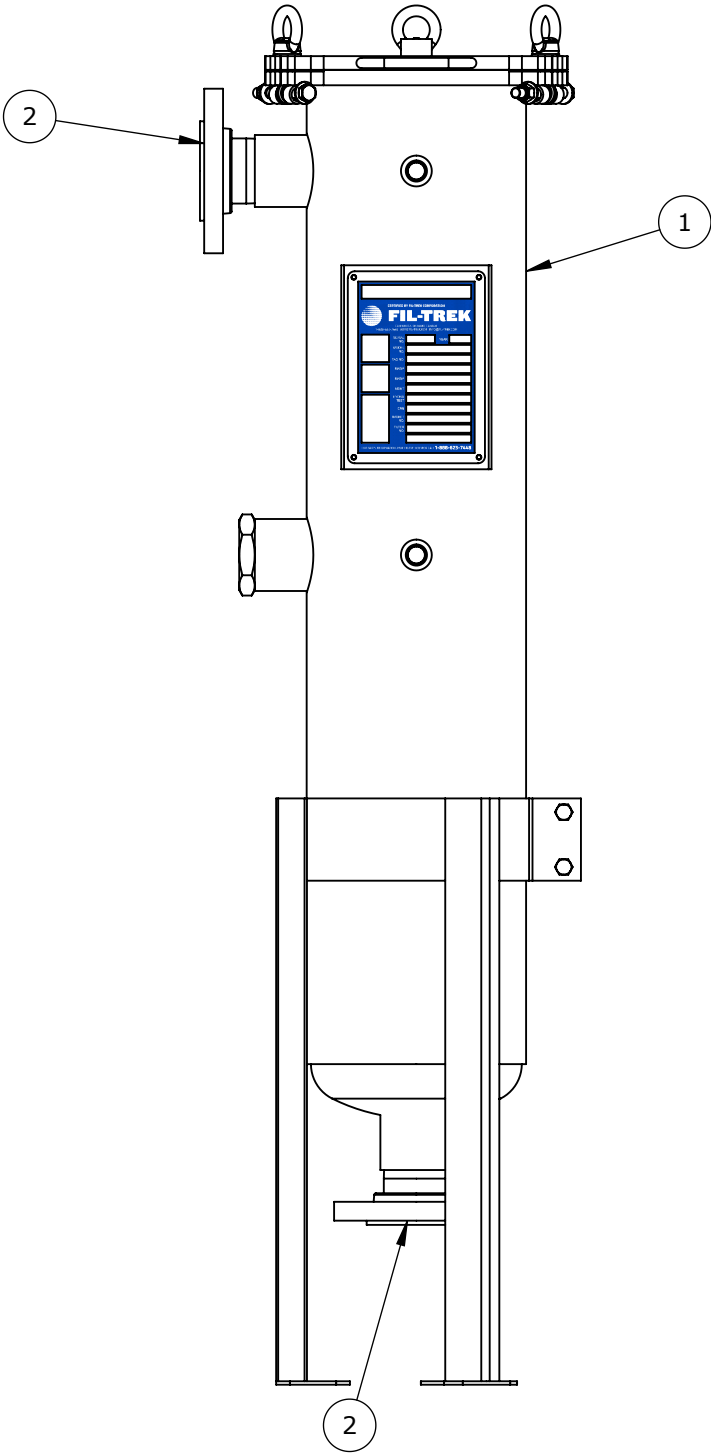

 THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED DECIMAL .X" =±.1" .XX" =±.02" .XXX" =±.005" FRACTIONAL 1/8" ANGULAR =± 1° MAX. MACHINED SURFACE FINISH 125		 FIL-TREK CORPORATION 55 Stafford Court Cambridge, Ontario N1T 1B3 Canada Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com	
THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION			
DESCRIPTION S4ESL112-2F-CDB-150		Default	
PARENT: NONE	DRAWN: JG	DATE: 2024-03-11	PART NO. 002001-18524
PAGE: 2 OF 2	CHK'D: TS	SCALE: NTS	REV. No. 0